



LED X
Extruded Aluminum LED light


LEDX

Extruded Aluminum LED light


LEDX utilizes state of the art LED technology to provide a maintenance free lighting solution with the benefits of energy efficiency and reliability. The slim anodized aluminum housing is designed for simple installation and application versatility. It's clean industrial design and pristine finish compliments any commercial, residential and museum environment.

The LEDX line offers a variety of extrusion profiles for applications that may require specific features. All LEDX products can be supplied in custom lengths to a maximum of 3 metres (120 inches) long. There are three options for white LEDs: Warm white (3500K), Natural white (4100K) and Cool white (5000K). For special effects lighting the LEDX can be special ordered with coloured LEDs available in blue, amber, green and red.



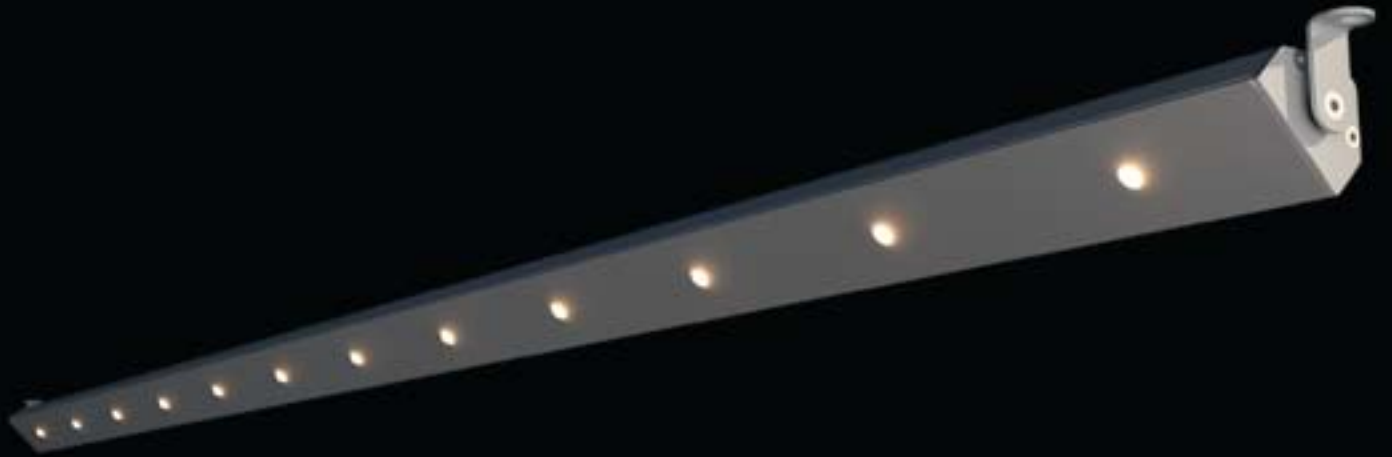


LEDX-1

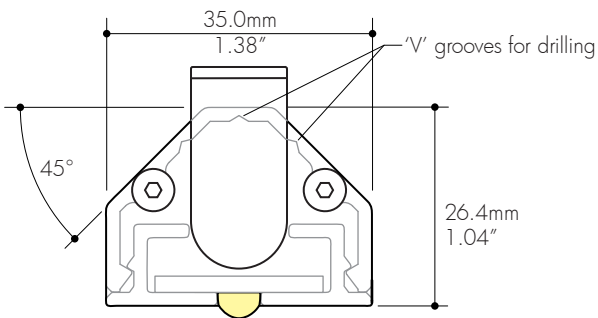

scale- 1:1


The LEDX-1 is the original fixture in the LEDX line. The rear housing of the LEDX-1 has integrated 'V' grooves which provide positioning for drilling if installing the fixture on a 45° angle or straight down. An optional bracket is available which makes the LEDX-1 directional.

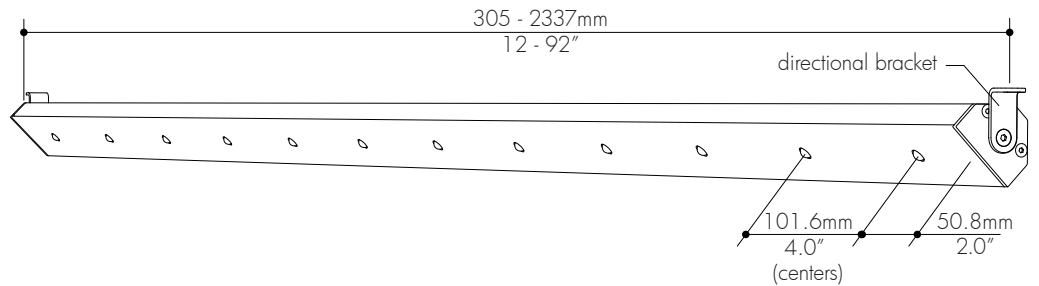





LEDX-2

The LEDX-2 is one of the thinnest fixtures in the LEDX line measuring only 12.4mm (0.49") thick.

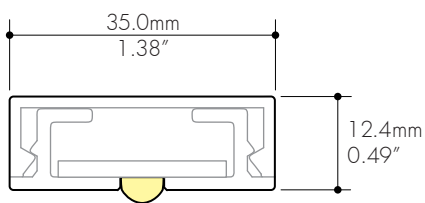

scale- 1:1

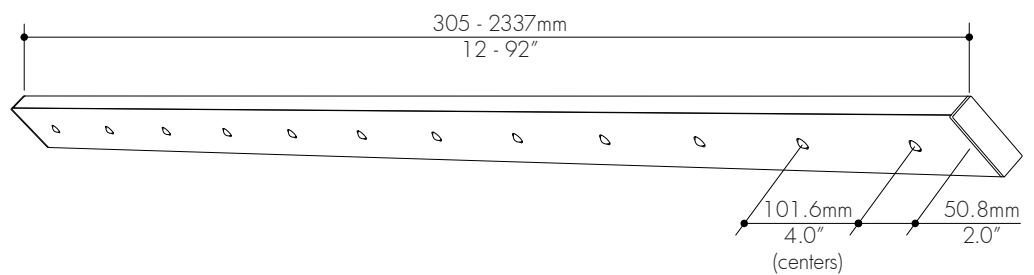


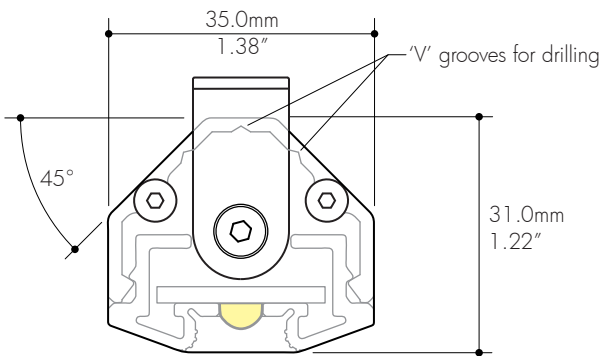

scale- 1:1


LEDX-3

The LEDX-3 has been designed with corrugated side baffles which reduce direct view of the LEDs; the corrugations diffuse the effect of the hot spot. The rear housing of the LEDX-3 has integrated 'V' grooves which provide positioning for drilling if installing the fixture on a 45° angle or straight down. An optional bracket is available which makes the LEDX-3 directional.

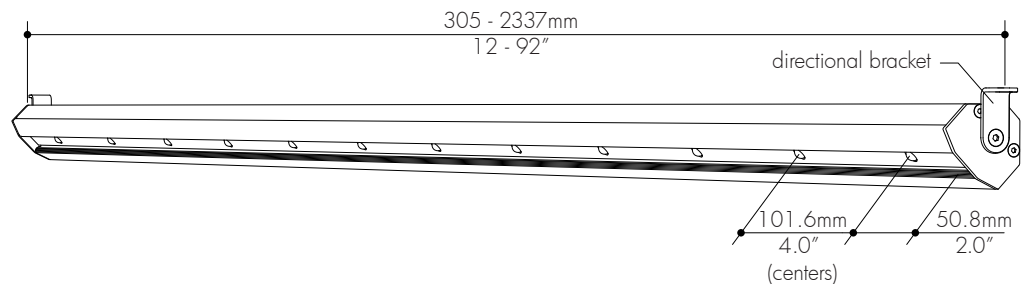




LEDX-4

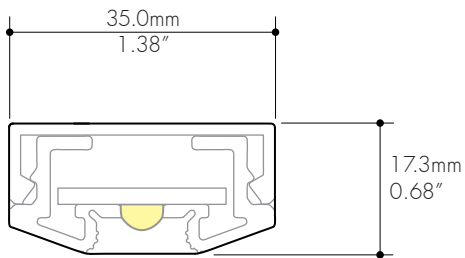

The LEDX-4 has been designed with corrugated side baffles which reduce direct view of the LEDs; the corrugations diffuse the effect of the hot spot.


scale- 1:1

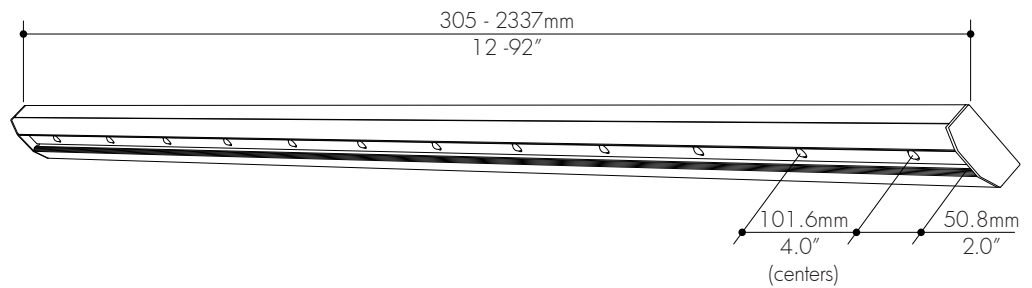





LEDX-5

The LEDX-5's unique 100° asymmetrical design features an integrated side baffle intended to reduce direct view of the LEDs. The smaller LEDX-5 cross-section is suitable for recessed applications as well as surface mounted situations that have limited space.

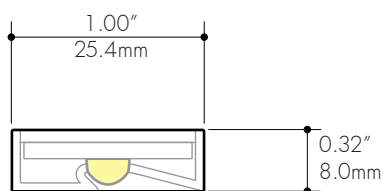


scale- 1:1

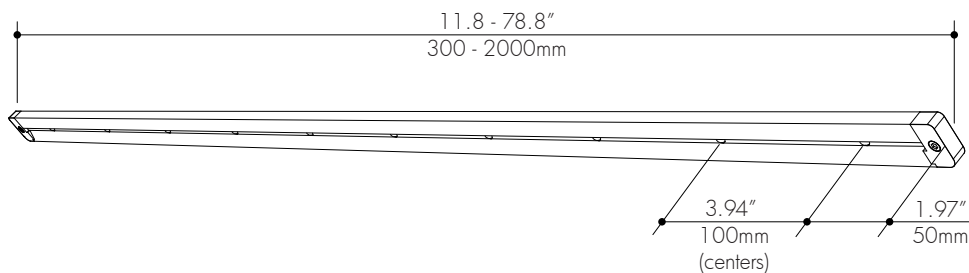


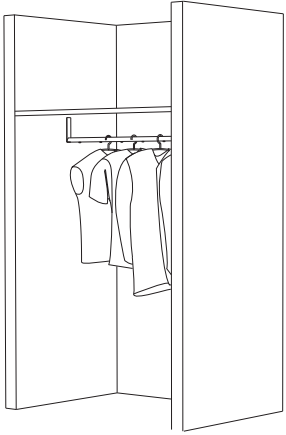


Bedroom closet clothes rack with LEDX hanging bar (see accessories)

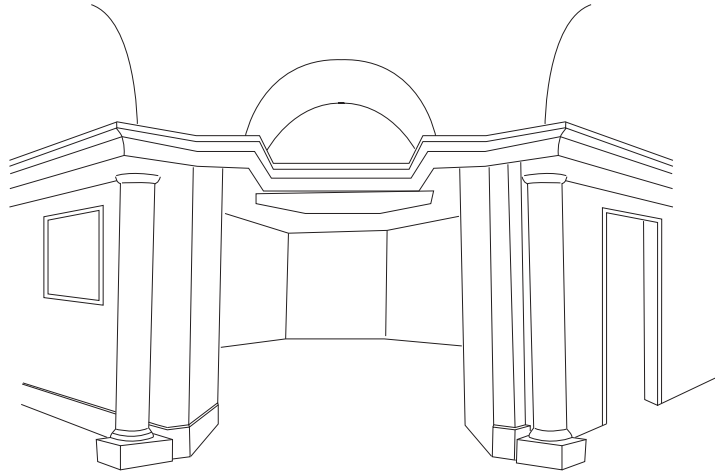


cove lighting with LEDX

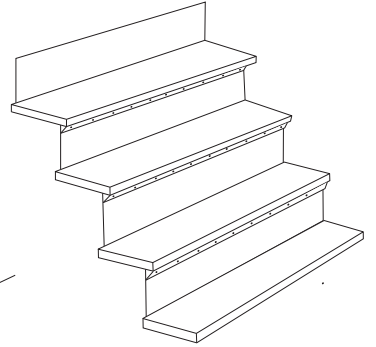

LEDX stair lighting

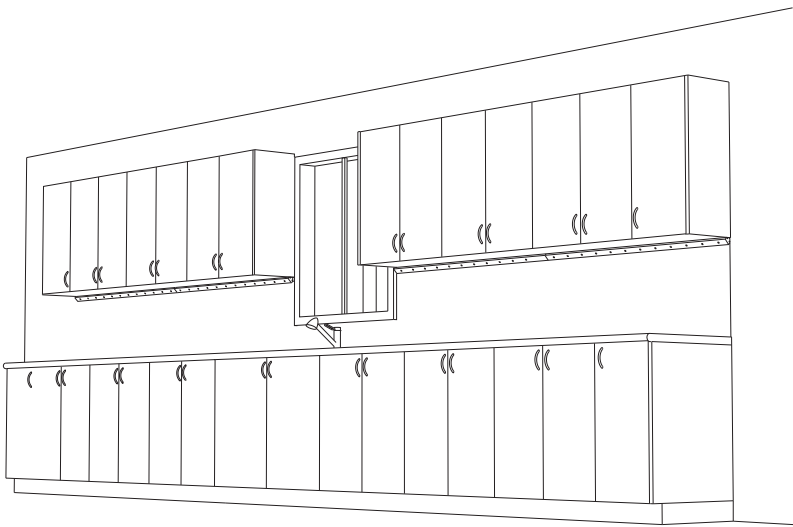


Under cabinet LEDX lighting for kitchen

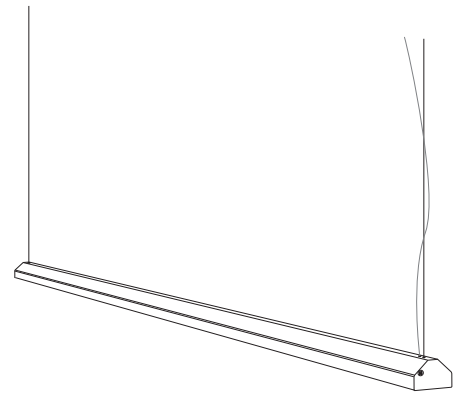


LEDX suspension


Applications

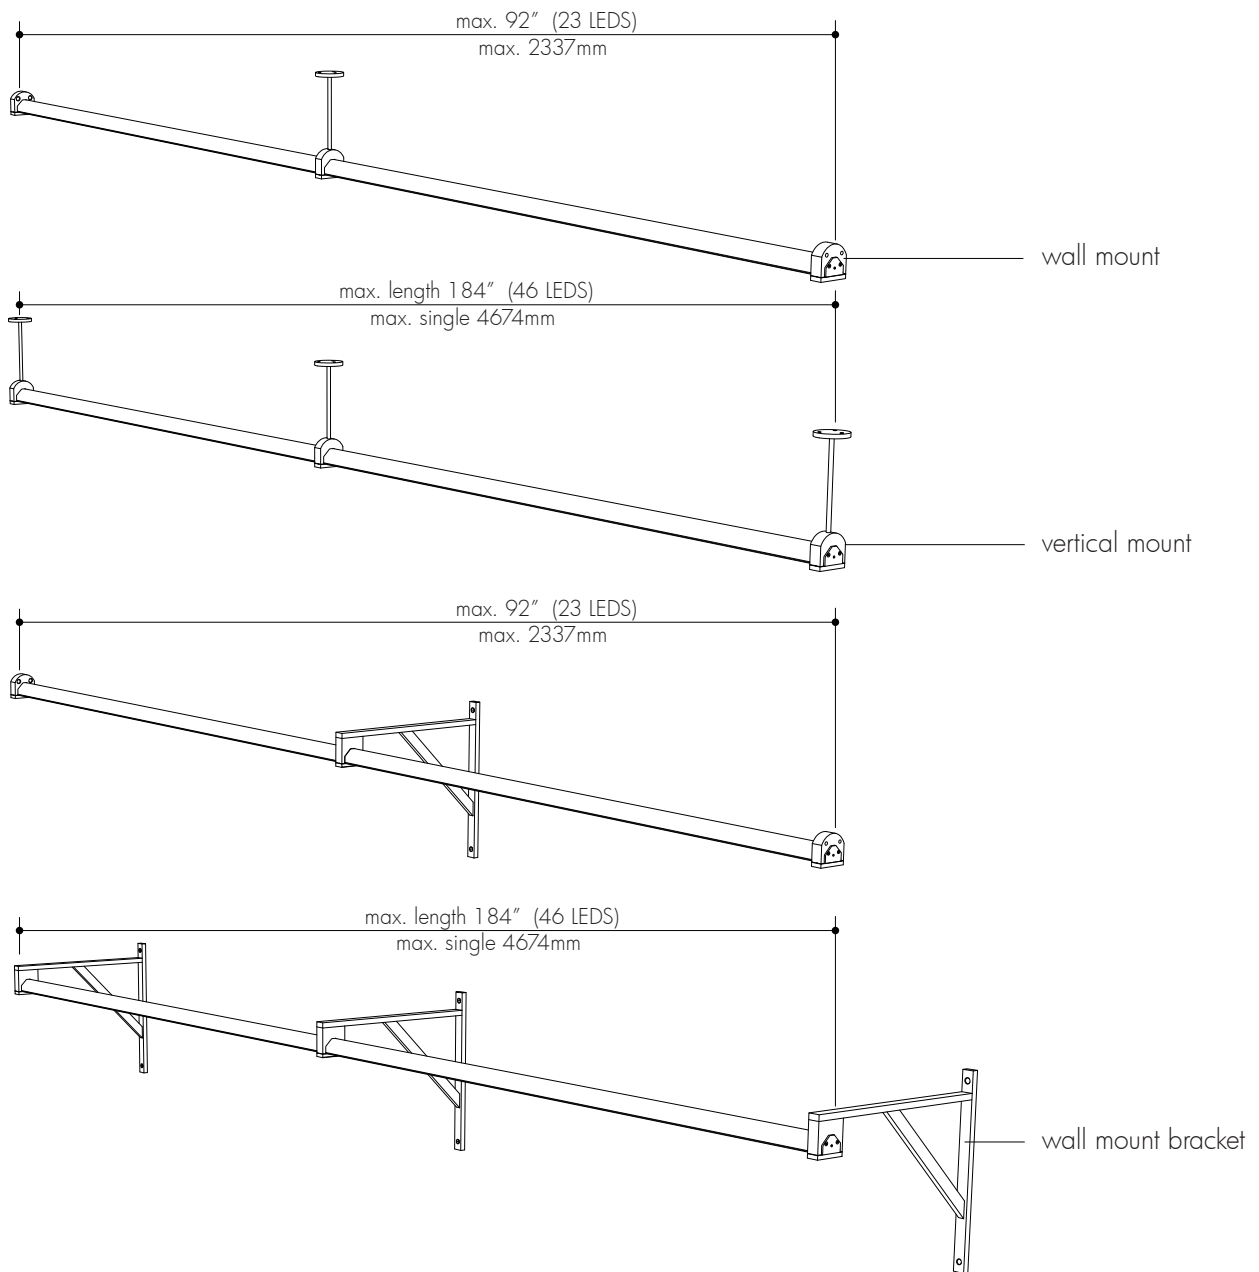



Note Under normal conditions a centre support is required every 48" (1219mm)





LEDX-1
clothes rack system
applications

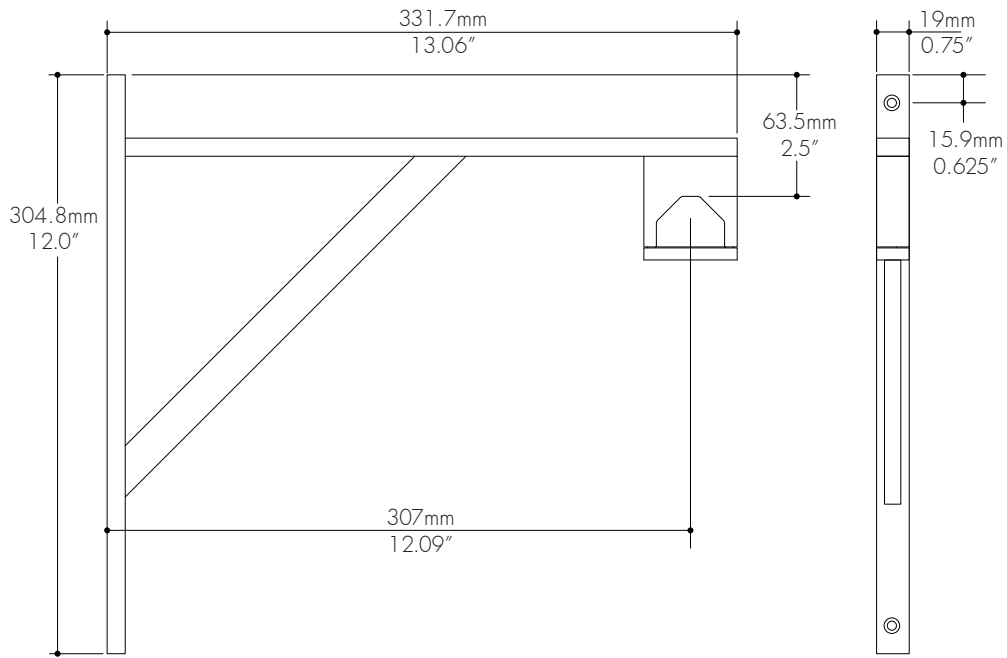

scale- 1:4 wall mount bracket

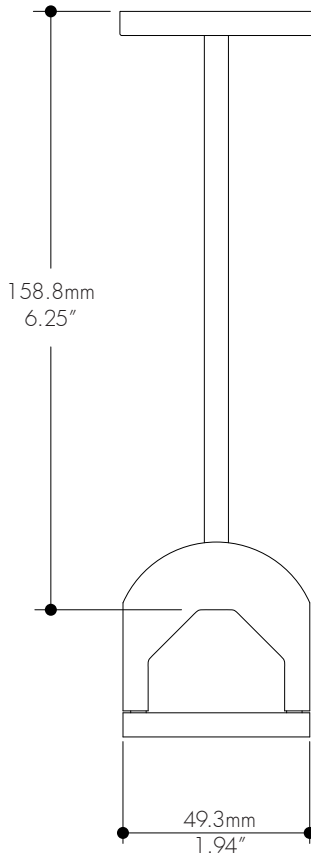

scale- 1:2 vertical mount

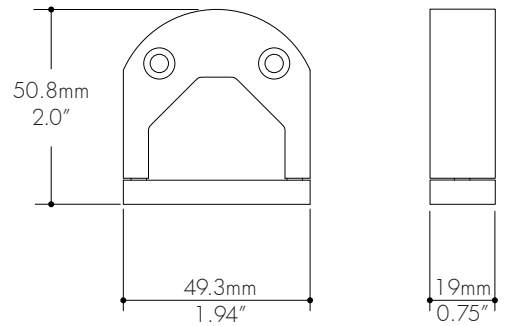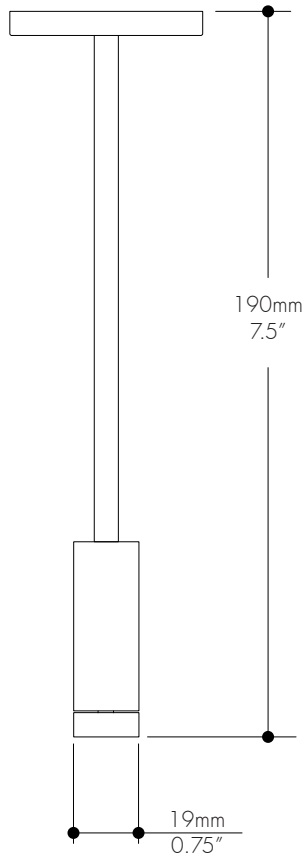












scale- 1:2 wall mount

LEDX-1

clothes rack system
parts list

Order Info

Total power	 1W per LED  2W per LED  3W per LED
LED colours (temp)	 Cool White (5000K)  Natural White (4100K)  Warm White (3500K) Blue (special order) Green (special order) Amber (special order) Red (special order)
Light increments	 100 mm (4") increments
Extrusion lengths	 Up to a maximum of 3m (120")
Extrusion finish/colour	 Clear anodize (matte silver) black anodize (matte) gold anodize (matte) blue anodize (matte) red anodize (matte) chrome brass
Accessories	 Directional bracket  Closet clothes rack

example order: LEDX-1, 1W, Warm White 3500K, 1 metre long, 100mm increments, Clear anodize, directional bracket

 **In Stock Item - Ready to ship**

approvals: CSA.US
CE

LEDX
Extruded Aluminum LED light

DISTRIBUTED BY:

